

GMG

Global Machinery Group, Inc.

1530-ED Micro

MICRO SLAB SCISSOR LIFT



AERIAL LIFT / INNOVATION AWARD WINNER



Award Winning i-Power

**Safer - Innovative
Extended Duty Cycle**

- **Direct Electric Drive** - providing whisper quiet operation and extended duty cycles
- **Light Weight** - 1,895 lbs (860 kg)
Perfect for elevator & mezzanine applications
- **Ramp Control*** - Automatically controls speed while descending grade or ramp
- **Variable Steering Speed*** - Precise Positioning
 - Safer Operation
 - Saves Battery Power
- **Elevated "Creep" Mode*** - Slows speed to 25% of normal elevated drive speed
 - Precise Positioning
 - Safer Operation
- **AGM Batteries** -
 - 100% Maintenance Free
 - Increased Performance
- **Battery Management System*** - Prevents Battery Abuse
 - Extends Battery Life
- **Compact Design** -
 - Fits Through Standard Door without folding rails
 - Folding Rails for easy storage
- **Unique Platform*** -
 - *Glide-Rite Deck Extension*, 100% supported off the main platform for smooth operation
 - Swing Away Material Entry

* GMG exclusive feature

www.goGMG.com

SPECIFICATIONS

MODEL	1530-ED Micro	
Measurements	US	Metric
Working height maximum	20',7"	6.3 m
A Platform height maximum	14',7"	4.4 m
B Platform height - stowed	35.75"	.91 m
C Platform length - retracted	50.5"	1.28 m
D Platform length - extended	72.2"	1.83 m
Slide-out platform extension deck	21.8"	.55 m
E Platform width - outside	29.5"	75 cm
Toeboard height	6.7"	0.17 m
F Height - stowed	80.5"	2.04 m
rails lowered	62.2"	1.58 m
G Length stowed	58.3"	1.48 m
w/o ladder	50.5"	1.28 m
H Width	29.9"	.76 m
I Wheelbase	41.3"	1.05 m
J Ground clearance - center	2.8"	7.1 cm
- pothole bars deployed	.9"	2.3 cm

Productivity



Maximum platform occupancy	2	
Lifting capacity	530 lbs	240 kg
Extension deck capacity	220 lbs	100 kg
Drive height	Full Height	
Drive speed - stowed	2.5 mph	4 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Drive speed - raised creep mode	0.1 mph	0.16 km/h
Gradeability - stowed	30%	
Turning radius - inside	13.7"	.35 m
Raise speed	27 seconds	
Lower speed	19 seconds	
Controls	Fully Proportional	
Drive	Direct Electric	
Tires - Solid, Non-marking	9" x 3"	22.8x 7.6 cm

Power

Power source	24v, 95Ah
--------------	-----------

Weight

ANSI	1,815 lbs	823 kg
CE	1,815 lbs	823 kg

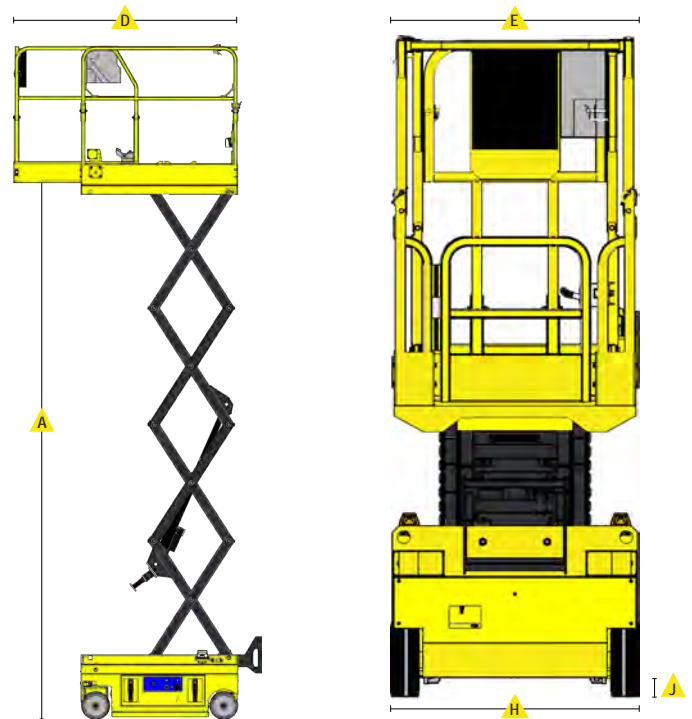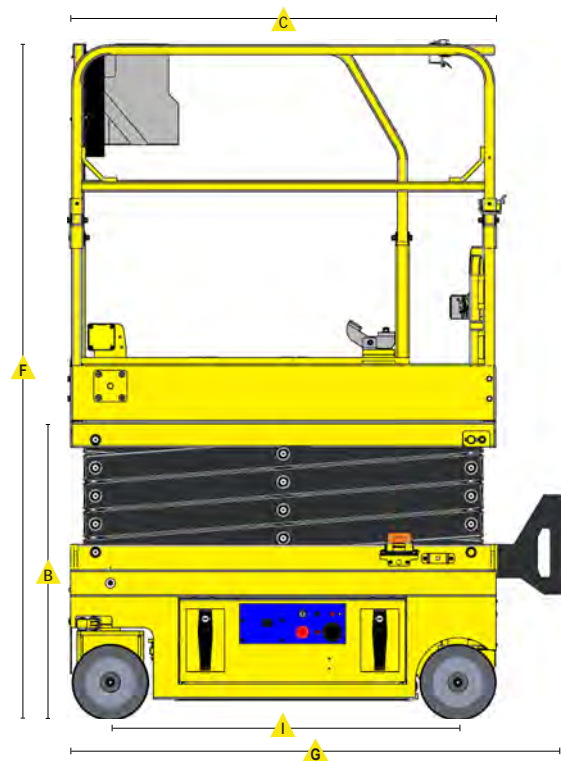

GMG Corporate Office

3428 Bullock Lane
 San Luis Obispo, CA 93401
 Phone: +1.805.303.2066
 Toll Free (USA/Canada): +1.800.301.0499

Distributed By:



www.goGMG.com